


Design Pressure = 600 PSI @ 120 °F  
 Min. Design Temperature = 20 °F @ 600 PSI  
 Hydrotest Pressure = 660 PSI

**600 PSI**  
 SIDE PORT

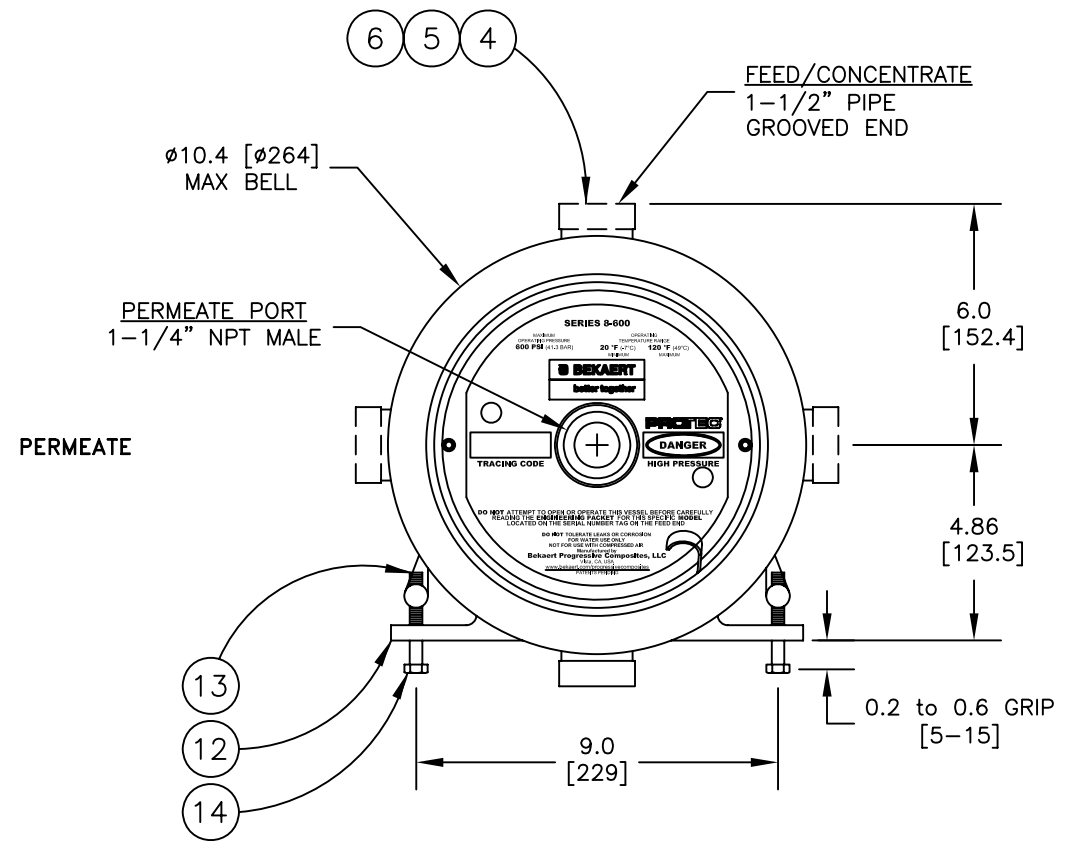

NOTE: STANDARD PARTS ARE SHOWN FOR REFERENCE ONLY  
 CHECK ORIGINAL ORDER FOR ORDERING SPARE PARTS

Shell Length Code	L inch (mm)	P1 Standard inch (mm)	P2 Optional inch (mm)	P3 Optional inch (mm)	S Span in (mm)	Empty Weight lb (kg)
-1	59 [1498.60]	47 [1193.80]	45 [1143.00]	46 [1168.40]	1 @ 28 [711.20]	87 [40]
-1.5	79 [2006.60]	67 [1701.80]	65 [1651.00]	66 [1676.40]	1 @ 42 [1066.80]	103 [47]
-2	99 [2514.60]	87 [2209.80]	85 [2159.00]	86 [2184.40]	1 @ 56 [1422.40]	118 [54]
-3	139 [3530.60]	127 [3225.80]	125 [3175.00]	126 [3200.40]	1 @ 80 [2032.00]	150 [68]
-4	179 [4546.60]	167 [4241.80]	165 [4191.00]	166 [4216.40]	2 @ 64 [1625.60]	181 [82]
-5	219 [5562.60]	207 [5257.80]	205 [5207.00]	206 [5232.40]	2 @ 78 [1981.20]	212 [96]
-6	259 [6578.60]	247 [6273.80]	245 [6223.00]	246 [6248.40]	2 @ 92 [2336.80]	243 [110]
-7	299 [7594.60]	287 [7289.80]	285 [7239.00]	286 [7264.40]	2 @ 106 [2692.40]	274 [125]
-7.5	319 [8102.60]	307 [7797.80]	305 [7747.00]	306 [7772.40]	2 @ 114 [2895.60]	290 [132]
-8	339 [8610.60]	327 [8305.80]	325 [8255.00]	326 [8280.40]	2 @ 120 [3048.00]	305 [139]

ITEM	QTY	P/N	DESCRIPTION	MATERIAL
1	1	4080021	Shell	Filament Wound, Epoxy FRP
2	2	4080032	Bearing Plate	6061-T6 Aluminum, SB-221, Anodized
3	2	4080177-2	Sealing Plate	Thermoplastic
4	2	4080257-1	Feed/Concentrate Port, 1-1/2", "D"	Stainless Steel, 316, SA-312
5	4	6121187	Retaining Ring, F/C Port, 1-1/2", "D"	Stainless Steel, 316, SA-479
6	2	6184604-N	O-Ring Seal, F/C Port, 1-1/2", "D"	Ethylene Propylene
7	2	4080309	Permeate Port	Noryl GFN2
8	2	6100442MK	Head Seal	Ethylene Propylene
9	2	6110229-N	Permeate Port Seal	Ethylene Propylene
10	2	4080320	Retaining Ring w/ Finger Pull	Stainless Steel, 316
11	2	6121200	Retaining Ring, Permeate Port	Stainless Steel, 316
12	2*	4080174	Support Saddle	Thermoplastic Rubber
13	2	4080137	Strap Assembly	Stainless Steel, 316
14	4	6150001	Strap Screw	Stainless Steel, 18-8
15	2	A/R	Adapter	Thermoplastic
16	1	4080165-1	Thrust Cone	PVC Thermoplastic
17	2	6110326-N	Adapter Seal	Ethylene Propylene
18	A/R	A/R	PWT Seal	Ethylene Propylene

\*3 each with shell lengths -4 and longer.

**NOTES:**  
 DIMENSIONS IN INCHES (MM APPROX.)  
 FOR REFERENCE ONLY, NOT FOR CONSTRUCTION UNLESS CERTIFIED  
 SHIMMING OF THE SADDLES MAY BE REQUIRED  
 CENTER VESSEL ON 2 OR 3 SUPPORTS AT SPAN(S) "S".  
 INCORRECT MANIFOLDING WILL CAUSE SEVERE LOCAL STRESS AROUND PORT AND MAY RESULT IN LEAKS AND PREMATURE FAILURE. TAKE EVERY PRECAUTION LISTED IN THE ENGINEERING PACKET OR USERS MANUAL.  
 INTERNAL PERMEATE PRESSURE MUST NOT EXCEED 125 PSI.  
 ASME SECTION X, 2007-A09  
 RP CODE STAMP OPTIONAL  
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



**PRO 8-600-SP**

ENGR EB 06/08/07	ECO 09279	REVISED 10/2/09	DRAWING 101004	REV Q
------------------------	--------------	--------------------	-------------------	----------